



Quality of Life  
Health  
Development

# NORAH

# Knowledge No. 2

## NORAH Noise Impact Study


Sound and Noise

**The basic principles of acoustics**

# NORAH

# Knowledge No. 2

## Sound and Noise: **The basic principles of acoustics**

“NORAH Knowledge” provides information on the methods and results of the NORAH noise impact study. The aim of this series is to communicate to as many people as possible what exactly NORAH researched. This is why there is an explanation in the glossary at the end for all terms marked “ glossary”.

If you would like to receive further issues of “NORAH Knowledge”, please use the enclosed order form.

In various parts of the study NORAH examines the long-term impact of traffic noise on health, quality of life and early childhood development in the Rhine-Main Region. Such a complex task confronts the acoustic experts involved with major challenges. On the one hand they have to determine various types of noise exposure in very large investigation areas as precisely as possible: the exposure to traffic noise differs considerably from town to town and from street to street, and even the storey of the building, the position of the bedrooms in the apartment, the type of walls and the glazing have an influence on just how much noise from aircraft, road and rail traffic actually reaches the ear of each individual study subject.

NORAH (“Noise-Related Annoyance, Cognition, and Health”) is the most extensive investigation into the effects of exposure to aircraft, road and rail traffic noise that has ever been carried out in Germany. It was conducted by nine independent scientific institutes from all over Germany. The client was the Umwelt- und Nachbarschaftshaus, a subsidiary of the state of Hessen and part of the “Forum Flughafen und Region”. Alongside the state of Hessen, communities, Fraport AG and Lufthansa were also involved in the financing.

The second big challenge consists in NORAH's aspiration to also take into account the noise exposures which the individual study subjects were subjected to in the past. It is only with this information that the scientists can gain objective, well-founded insights into the long-term effects of noise – for example into the links with the occurrence of chronic diseases. In this issue of “NORAH Knowledge” we present the methods which the acoustic experts on the NORAH team used to calculate address-specific values for the aircraft, road and rail traffic noise exposure in the whole investigation area around Frankfurt Airport and at the airports Berlin-Brandenburg, Cologne-Bonn and Stuttgart – and not only for the current situation, but also in some cases (at Frankfurt Airport) going back over the last 18 years.

## Contents

---

Task, team and investigation area

→ [Page 2](#)

Where do the aircraft noise data come from?

→ [Page 6](#)

Calculating road and rail noise

→ [Page 8](#)

The role of acoustics in the NORAH Study

→ [Page 10](#)

Brief portrait of NORAH

→ [Page 12](#)

Further information on NORAH can be found on

→ [Page 12](#) and on the Internet at

[www.laermstudie.de](http://www.laermstudie.de)

### Contact

Please address any questions about the NORAH Study to the Umwelt- und Nachbarschaftshaus:

Gemeinnützige Umwelthaus GmbH  
Rüsselsheimer Str. 100  
65451 Kelsterbach

<b>Tel.</b>	06107 98868-0
<b>Fax</b>	06107 98868-19
<b>Email</b>	<a href="mailto:norah@umwelthaus.org">norah@umwelthaus.org</a>
<b>Internet</b>	<a href="http://www.laermstudie.de">www.laermstudie.de</a>

## The task

In order to precisely investigate the effect of noise ([📘 glossary](#)), the NORAH Study scientists need exact data on the exposure of each individual study subject to aircraft, road and rail noise. Not only the current exposures, but also noise exposures in the past play a role. This is because, in particular for the occurrence of chronic disorders, observation over long periods is decisive. Sound levels measured or calculated only for the current situation are not sufficient because chronic diseases do not develop “overnight”, but over a prolonged period. This is why the scientists also take into account the respective noise exposure of the surveyed persons in the last 18 years. Moves of the study subjects also go into the calculations: someone who has not been living long near the airport could possibly respond differently to a long-term resident.

NORAH takes account not only of aircraft noise, but also rail and road noise (total traffic noise observation), and that alone at Frankfurt Airport for around 900,000 buildings in the investigation area and at different times of the day and night. For the NORAH sub-study on childhood development this means, for example, that not only the aircraft noise at school, but also at home is taken into account. In order to include all of these factors, the scientists draw up an enormous amount of different acoustics data. For example, they also measure the room acoustics of the classrooms and look at the insulation of the buildings.


In order to generate comparisons with other airport locations, the scientists in the quality of life sub-study investigated the effects of noise on around 5,000 residents at Berlin-Brandenburg Airport before it begins operations, and on 2,500 residents in the areas of both Cologne-Bonn Airport and Stuttgart Airport.

Sound and noise are not the same. To understand the following pages, it helps to know the difference: **Sound** ([📘 glossary](#)) is a term from physics, and refers generally and neutrally to noises emitted by a cause (source). These sounds are propagated in the air by pressure and density fluctuations (vibrations). These fluctuations can be determined using the sound pressure level ([📘 glossary](#)). The unit of measurement for the sound pressure level is the decibel (dB) ([📘 glossary](#)). How loud we perceive a sound to be varies from person to person.


**Noise** ([📘 glossary](#)) generally refers to undesired sound that is perceived as an annoyance, impairs wellbeing and, depending on loudness and duration, can even make people ill. Unlike sound, noise is not objectively measureable but **purely subjective**. This means that every person perceives sounds differently. Some people are hardly bothered, while others find even relatively low sound pressure levels a considerable burden.

One of the central values in acoustics is the sound pressure level or, more simply, sound level. It describes the loudness of the sound. The human ear can process a value range from 0 to 120 dB. The so-called absolute threshold of hearing is at 0 dB. The pain range begins at around 125 dB. As the decibel scale is a logarithmic scale, special rules apply here: an increase of the sound output of a machine by 10 dB means a multiplication of the sound intensity by 10, an increase of 20 dB a multiplication by 100 and of 30 dB by one thousand.

## Everyday noises – the noise thermometer

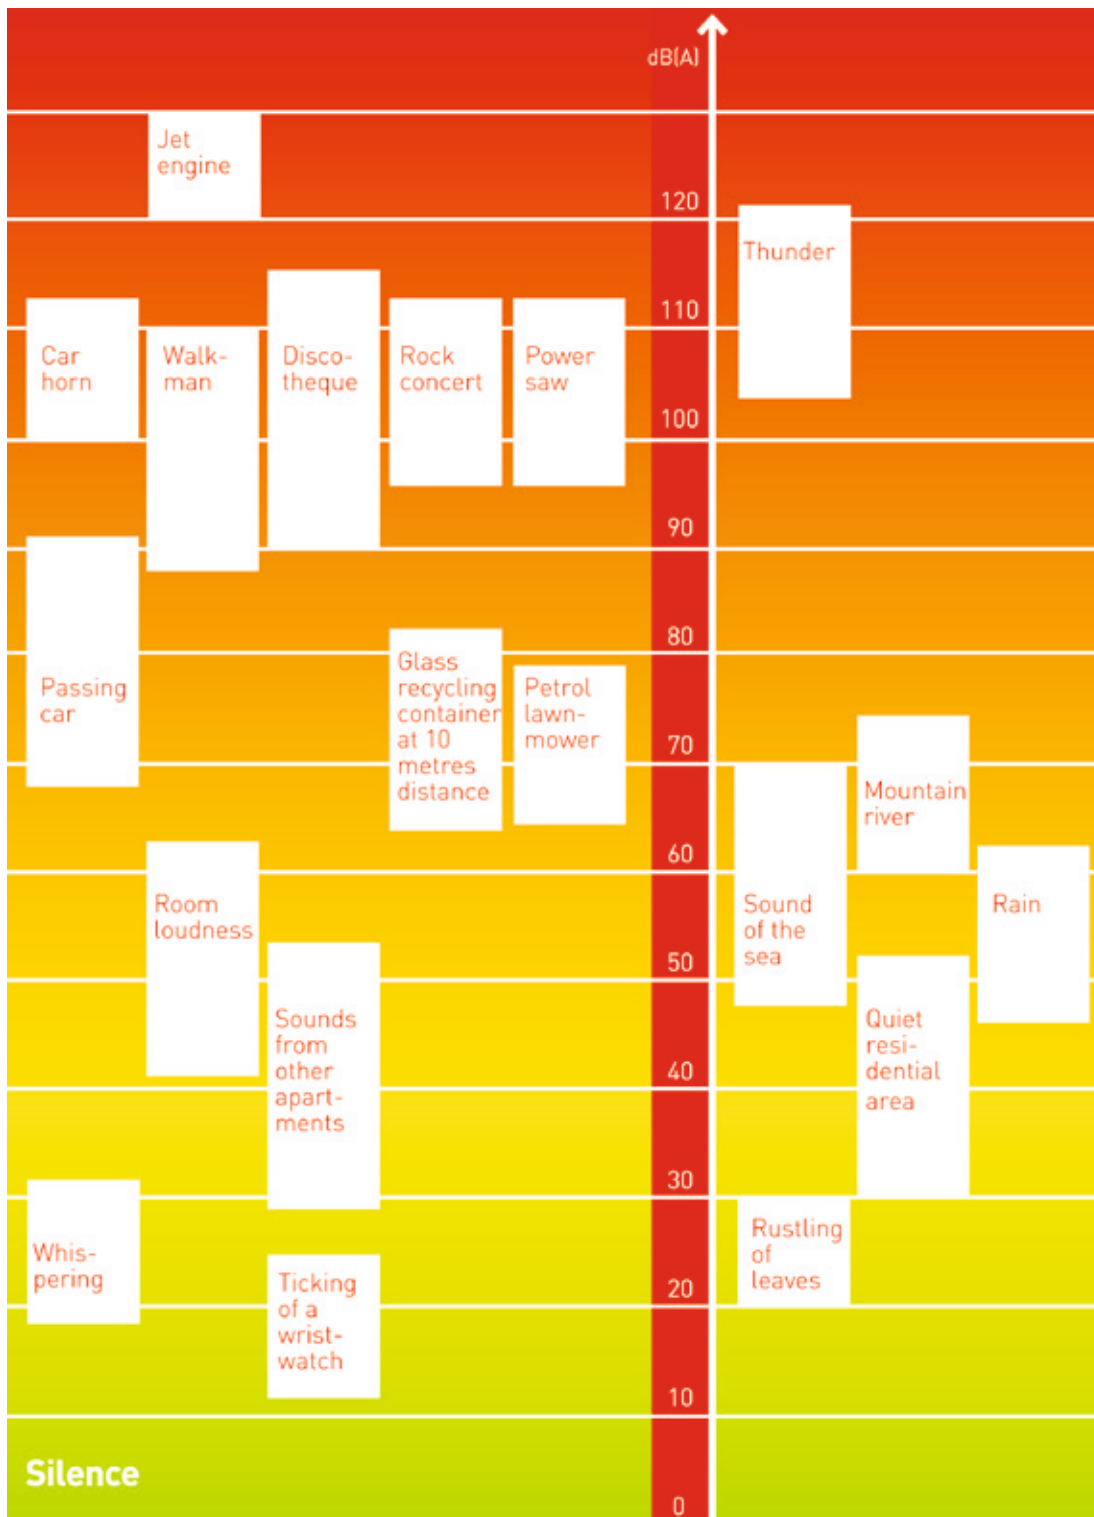

Deutsche Gesellschaft für Akustik (German society for acoustics – DEGA),  
Brochure “Lärm im Alltag” (Noise in Everyday Life)

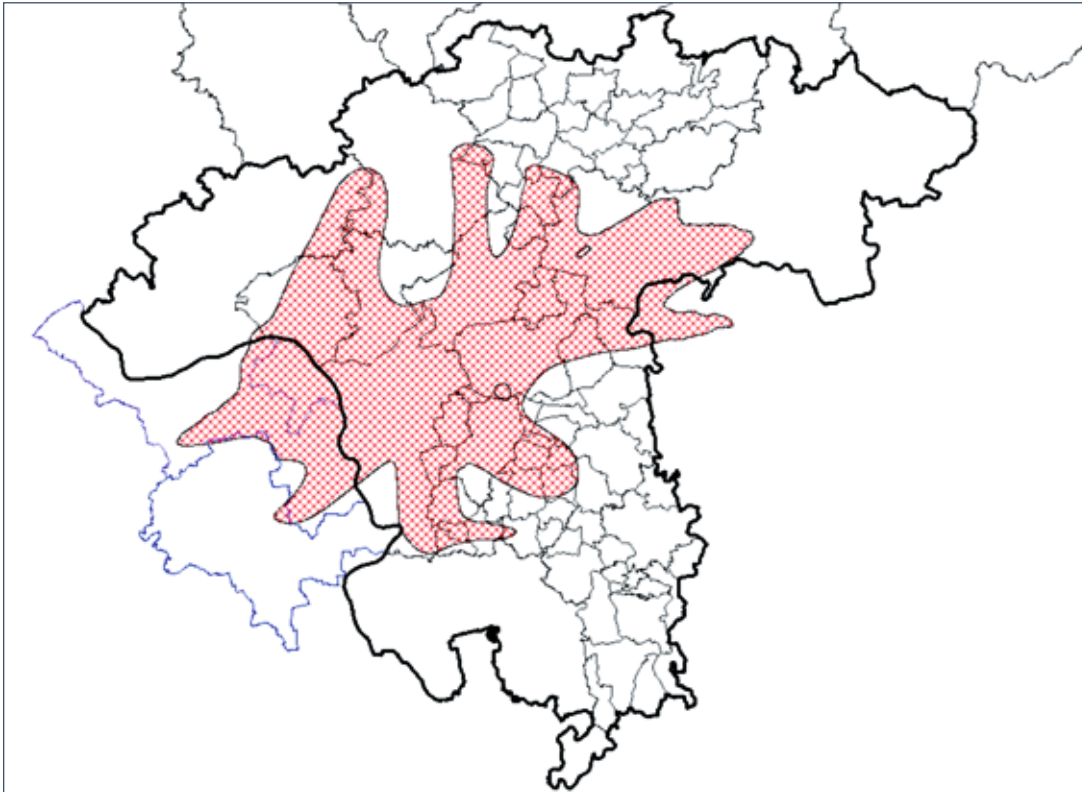

The map shows “overlaps” of the investigation areas per study module. The red hatching delineates the investigation area of the study modules quality of life and development. The thick black line shows the border of the administrative district of Darmstadt. The thin blue lines on the left enclose four regional districts in Rhineland-Palatinate (Worms, Alzey-Worms, Mainz and Mainz-Bingen). In connection with the borders of the administrative district of Darmstadt, these four regional districts form the investigation area for the study module on health.

## Team

For the execution of the NORAH Study a research consortium from nine institutions was formed under the overall coordination of Prof. Dr. Rainer Guski (Ruhr University of Bochum) and Dirk Schreckenberg (ZEUS GmbH). The noise calculations for aircraft, rail and road traffic in the Rhine-Main Region, as well as the calculation of the aircraft noise exposure at the three other airports Berlin-Brandenburg, Cologne-Bonn and Stuttgart, were carried out by the engineering consultants Möhler + Partner Ingenieure AG as well as the company AVIA Consult.

### Long-term energy equivalent sound level

([glossary](#))

The energy-equivalent long-term energy equivalent sound level (in short:  $L_{eq}$ ) is a measure for the average noise exposure over a certain period (e.g. day or night). It is thus a measure for the average noise exposures in a certain period. It is made up of frequency, duration and level of the individual sound events. The  $L_{eq}$  is the basis for the determination of noise protection zones pursuant to the aircraft noise act – separated according to day (6 a.m. – 10 p.m.) and night (10 p.m. – 6 a.m.). The measurement unit for the  $L_{eq}$  is the same as that for the sound pressure level: decibel (dB).

## Investigation area at Frankfurt Airport

The investigation area of the NORAH Study is based on the level of noise exposure: it includes the area around Frankfurt Airport in which the long-term energy equivalent sound level from aircraft in the reference year 2007 was over 40 dB. This area extends around 100 km from east to west and around 65 km in the north-south direction.

As well as aircraft noise, the scientists are also investigating the effects of road and rail noise here, and carrying out the sub-studies on quality of life, blood pressure, sleep quality and on childhood development.

The health sub-studies extend even beyond this boundary. They are investigating all residential areas in the administrative district of Darmstadt as well as in Mainz and Rhine-Hessen. The investigation area is around 150 km from east to west and around 120 km from north to south. The aim of these two sub-studies is to survey a cross-section of the population in the entire Rhine-Main Region in order to be able to evaluate their state of health in relation to traffic noise. The acoustics experts also provide noise data for these sub-studies.




The same applies at Berlin-Brandenburg, Cologne-Bonn and Stuttgart as at Frankfurt Airport: in each case the investigation area includes the area around the airport in which the aircraft-related long-term energy equivalent sound level lies above 40 dB (A).

### Maximum sound level ([glossary](#))

The parameter which has the greatest influence on the irritation factor of a noise is the maximum sound level. It determines how strongly the noise stands out from the existing background noises. The maximum sound level is used for the calculation of another aircraft noise evaluation measure (long-term energy equivalent sound level), but is also an independent criterion in itself for the evaluation of the aircraft noise situation. The irritation effect depends on the level and the frequency of occurring maximum sound levels. The maximum sound (pressure) level is the highest measurement value that a sound level meter measures during a defined measurement period.

## Investigation period

The investigation period in which the scientists examined and calculated the acoustic data within the framework of the NORAH Study extends from 1996 to 2014.

Investigation period	
	
	1996 -----> 2014
	

## WHERE DO THE AIRCRAFT NOISE DATA COME FROM?

### Data Acquisition System (DAS) – the aircraft noise measurements

---

Aircraft noise can be investigated in two ways: either it is calculated or it is measured. With a measurement it is only possible to register the current status at a point; with calculations, however, it is possible to represent noise exposure over large areas in the future. The present-day noise calculation programs allow experts to model complex situations. If they want to calculate the aircraft noise, they need information on the incoming and outgoing aircrafts: number, size, weight and technical equipment of the aircrafts as well as the type of operation, i.e. aircraft altitude and aircraft routes. The acoustics experts feed these data into mathematic formulae to calculate the noise exposure.

In Germany aircraft noise is subject to statutory regulation: airports are obliged to save data on incoming and outgoing aircraft. According to an established formula, the acoustics experts can calculate where in the area of the airport how much aircraft noise is being generated. The core of the calculations is the so-called Data Acquisition System (DAS) ([📘 glossary](#)). It contains information on the airport such as the orientation, length and geographical location of the runways and landing strips, the incoming and outgoing routes, and the number and type of takeoffs and landings. The DAS also contains the respective aircraft class and the information on the noise development of the aircraft. Day and night aircrafts are registered separately. On the basis of this information a software program uses a legally established formula, the “Guide to the Calculation of Aircraft Noise” (AzB08) to calculate where, when and how much noise is generated.

Nonetheless, the DAS data for Frankfurt Airport were not sufficient to answer the research questions of the NORAH scientists: for one thing, the stored aircraft routes were too short to allow conclusions to be drawn about the whole investigation area. In addition to this, the data from the previous years was not as detailed as necessary.

### Aircraft noise calculation by NORAH

---

How can you reconstruct sound events which occurred up to 18 years ago? The answer of the NORAH experts: in the case of aircraft noise you can use radar data or, to be more precise, the radar records of Deutsche Flugsicherung, the company in charge of air traffic control for Germany. For decades the state-owned company has been collecting and storing the “aircraft courses” of every single plane flying in German air space. The radar data used in the NORAH Study are provided by Deutsche Flugsicherung.

### From radio traces to the noise database

---

Unlike the “aircraft corridors” stored in the Data Acquisition System, the radar data provides precise information on the route flown and altitude for every aircraft – like a line in three-dimensional space. In order to compile a noise database for the Rhine-Main Region from these radio traces, a special software is necessary. This is why the NORAH acoustics experts upgraded the software that normally works with the data of the DAS in such a way that it can also calculate the aircraft noise exposure with radar data in accordance with the calculation regulation AzB08 ([📘 glossary](#)). With success: with the aid of comparisons with aircraft noise measurement values, the acoustics experts of the NORAH research team were able to show that the aircraft sound levels calculated using radar data provide a very good representation of the actual aircraft noise exposure.



Aircraft noise calculations over all modules	
Individual long-term energy equivalent sound level	The NORAH acoustics database contains for each study subject around 30 “acoustic indicators”, including the so-called equivalent long-term energy equivalent sound level by day (6 a.m. – 10 p.m.) and night (10 p.m. – 6 a.m.), average maximum sound levels as well as maximum sound level statistics. From these data the researchers can calculate which sound levels from aircraft, road and rail noise each individual study subject was exposed to in the various annual periods between 1996 and 2014. All of the data are, of course, anonymized according to the data protection regulations.
Acoustic indicator	
Time ranges	
Quality of Life Study	The long-term energy equivalent sound level can fluctuate greatly over the course of the day. This is why the levels are stated separately for different time ranges: e.g. hourly 5 to 6 hrs, day 6 a.m. to 6 p.m., evening 6 p.m. to 10 p.m. and night 10 p.m. to 6 a.m. Alongside the long-term energy equivalent sound level, the maximum levels are also stated for these time ranges.
Long-term energy equivalent sound level over the course of time	
Health Study	The long-term energy equivalent sound level can change over the course of time. For example, the traffic volume distribution on workdays can differ from that on the weekends. In order to take account of these changes, the long-term energy equivalent sound level is measured for individual weeks and months and for the half year and the whole year.
1997 to the present Reference year 2005	
Child Study	Within the long period from 1997 to the present, the traffic volumes and traffic routes can have changed starkly, with effects on the noise exposure of the residents. For this purpose, precise calculations were made for the reference year 2005 and estimates made for the other years.
Home address Schools – exterior level Schools – interior level	
Overall view	The sound exposure of the children concerned changes depending on where they are. The noise exposure is lower indoors than outdoors. The noise exposure in the school can also differ from that in the home. This is why the levels for the different locations were calculated separately.
	The NORAH scientists calculated the noise exposure in a differentiated manner: according to daily, monthly and yearly changes, and depending on the location. This provides extensive information on the noise exposure of the individuals concerned. Depending on the questions addressed by the individual parts of the study, the acoustic indicators can be precisely selected which best describe the respective effect.

## Calculating road and rail noise

Just like the aircraft noise, the road and rail noise is nowadays mainly calculated rather than measured. The reason for this is that in the case of measurements, the weather conditions, for example, background noise or also difficult-to-register fluctuations of the traffic frequency over time can influence the measurement values. Accordingly, measurements are only ever a snapshot. For the objectives of the NORAH Study it is also important to know the noise exposure in the past. These values cannot be calculated, of course, by measurements, but determined only by calculation.

In Germany, the observation of road traffic is one of the tasks of the public administration. The observation of the roads within a community is the responsibility of the local authorities, while the federal authorities are responsible for the motorways. Not only for noise protection measures, but also, for example, for traffic planning, it is important to know how many vehicles are driving on a road at which times of the day. This is why the traffic authorities regularly carry out traffic surveys. The NORAH acoustics experts were able to use this information for their calculations. Other information was also used for the calculations, including the permissible top speeds and the various types of road surface. The scientists even took into account whether a road is sloped or level.

The NORAH scientists received information about rail traffic from the Federal Railway Authority and from the Bahnumweltzentrum Berlin. With these data they were able to reconstruct which trains travelled at which speeds and on which routes in the investigation area between 1995 and 2010. These data also provide information on the types of train (passenger trains or goods trains), train lengths and even changes in speed. The NORAH acoustics experts were able to use this to calculate which rail noise is generated when and where.

The road and rail traffic noise was calculated using the same methods as were used for the noise mapping in connection with the EU environmental noise directive.

### Sound propagation

From the point of view of the acoustics experts, cars and trains are sound sources. In order to calculate from the strength of a source which sound level applies to a person, the acoustics experts have to follow the path of the sound from the source to the ear. For the calculation of noise it thus makes a big difference whether a train or truck is driving on low ground or on a hill. Buildings or noise protection walls can also influence the propagation of the sound. In the case of aircraft noise, the distance and the angle between a building and the aircraft play a role in the propagation of the sound. In order to register such circumstances on site, the scientists use three-dimensional terrain models for their calculations provided by the regional ordinance survey offices. For the area of the administrative district of Darmstadt, for example, the researchers used a digital terrain model accurate to 10 metres provided by the Hessen Regional Office for Soil Management and Geoinformation. This allowed them to take all of the buildings in the investigation area into account.

## Site-specific noise calculations

Just like the aircraft noise data, the road and rail noise values for all study subjects also go into the NORAH database. Taken together, they can be used to draw up address-specific and time-specific noise exposure profiles for each individual. The database also contains information provided by the study subjects, for example, on the storey or the position of their bedroom. This is because even apparently small influences on the propagation of the sound can have a considerable effect on how much noise actually reaches the ear of a study subject. For example, the doubling of road traffic at a location would only lead to an increase in the long-term energy equivalent sound level of around three dB. The sound level, however, that can be measured in front of a house on a busy road is around 15 to 20 dB higher than it is at the back of the house.

“The sound level in front of a house on a densely frequented street is around 15-20 dB higher than it is at the back of the house.”

Photo: Deutscher Verkehrssicherheitsrat (DVR)



## The role of acoustics in the NORAH Study

---

How do the NORAH scientists link their findings on noise exposure with the data that they collect on quality of life, health and childhood development?

Just to remind you: the NORAH Study wants to find out what effect noise exposures have on people – whether, for example, the quality of life is reduced, the risk of high blood pressure and cardiovascular disorders is increased, or the intellectual development of children is impaired.

This is why the scientists assign to each study subject an individual data set with the traffic noise exposure at different times of the day and night, and from the present going back in some cases for up to 18 years. This is the only way that they can, for example, establish connections between an earlier traffic noise exposure and a chronic disease.

The scientists compare the acoustic data with data on health and quality of life – both separately for road, rail and aircraft noise as well as “overlapped” for the overall noise exposure. To collect the data on health and quality of life, the scientists carried out extensive surveys, tests, blood pressure and sleep measurements in the entire investigation area. They are also analyzing the health insurance data of 1.5 million insured persons.

The noise data already played an important role in the selection of the subjects for the individual sub-studies. On the basis of these data it was possible to examine persons selectively from various “sound level classes”. The Child Study, for example, involved second-class schoolchildren from 29 schools. The schools are divided into three groups of seven exposed to a long-term energy equivalent sound level of 40–45 dB, 45–50 dB and 50–55 dB respectively, and eight schools where a long-term energy equivalent sound level of more than 55 dB prevails during the day. This makes it possible to statistically register differences between the development of the children in the various sound level classes **(for further information on the Child Study, see NORAH Knowledge No. 1 – “The NORAH Child Study: Effects of aircraft noise on children”)**.

## Data protection in the NORAH Study

---

A study that examines such a wide range of individual health and address-specific information has to be very careful about compliance with data protection regulations. This is why the NORAH scientists have elaborated a system that brings all of the relevant data for each study subject together while preserving the subject’s anonymity. Expressed simply, the scientists assign numbers to the study subjects which cannot be traced back to the person. Before the study started, the NORAH scientists had their research project, their methods and their data protection concept thoroughly examined and approved by various ethics committees and the data protection authorities of the federal states concerned.



Photo:Fraport



## NORAH overview

The noise impact study NORAH (Noise-Related Annoyance, Cognition, and Health) is one of the most extensive studies internationally on the effects of aircraft, rail and road traffic noise on the health, quality of life and development of the population. Several research and development institutions from

the fields of medicine, psychology, social science, acoustics and physics have joined to form the NORAH research consortium. The investigations are carried out mainly in the Rhine-Main Region, but also in the regions around the airports Berlin-Brandenburg, Cologne-Bonn and Stuttgart.

### Overview of the NORAH sub-studies

#### Quality of Life Study

This sub-study investigates over three years how people living in the proximity of an airport suffer from aircraft, rail and road traffic noise, which sound levels they are exposed to, what changes in the noise exposure mean to them, and how they assess their health and quality of life. A total of around 27,000 people at four airports are taking part in the surveys.

#### Sleep Study

Very early or very late aircrafts take place when many people are in bed. How well they actually manage to sleep despite the noise is the subject of the Sleep Study. For this purpose, the sleep of the study subject is electronically monitored over several nights like in a sleep laboratory. Parallel to this, a sound level meter registers every noise in the course of the night directly at the ear of the sleeper.

#### Health Study

Using the health insurance data of 1.5 million insured persons in the Rhine-Main Region, the NORAH team examines how frequently various disorders, including heart disorders and depressions, occur in the region, and which noise the persons concerned were exposed to. There is a special emphasis on cardiovascular disorders: the scientists additionally surveyed study subjects with newly contracted disorders for other risk factors such as obesity or tobacco consumption.

#### Blood Pressure Study

Does the blood pressure react to aircraft, rail and road traffic noise? What happens when the noise exposure changes? The blood pressure study pursues these questions in monitoring projects. Study subjects from areas with different noise exposures measure their own blood pressure every morning and evening for three weeks. More than 1,300 persons took part in the initial measurement phase. The second one runs until May 2014.

#### Child Study

Does noise have an effect on the development of children? This is what the scientists want to find out in the Child Study. Investigations with more than 1,200 second-class school-children in the Rhine-Main Region illuminate the connection between noise exposure and intellectual development. Surveys provide information on the quality of life of the children.

#### Quality of life module

#### Health module

#### Development module

# Glossary

---

You will find further explanations in the glossary on [www.laermstudie.de](http://www.laermstudie.de).

## AzB/AzB08

The “Guide to the Calculation of Noise Abatement Ranges” (Anleitung zur Berechnung von Lärm-schutzbereichen) is a calculation method with which the noise abatement ranges can be established in accordance with the law on the protection against aircraft noise dated 01.06.2007 and the first implementing ordinance of the aircraft noise act dated 2007. This calculation method is also used in the calculation of the aircraft noise in the NORAH Study. Wherever AzB08 is mentioned, this refers to the current version from 2008.

---

## DAS

The Data Acquisition System contains data on the airport, the take-off and landing corridors, as well as the number of aircraft movements. The system also stores the “noise class” to which the respective aircraft type belongs.

---

## Long-term energy equivalent sound level

The equivalent long-term energy equivalent sound level (in short:  $L_{eq}$ ) is a measure for the average noise exposure over a certain period in which frequency, duration and level of the individual sound events are taken into account. The  $L_{eq}$  is measured in decibels (dB). Alongside long-term energy equivalent sound level, acoustic experts use a range of other terms to distinguish different types of sound levels, e.g. the maximum sound level.

---

## Decibel

Decibel is a physical unit of measurement used, among other things, for the sound pressure level.

---

## Digital terrain model

A digital terrain model contains the elevation data for the terrain at several points. These points are arranged in specified, regular grids, e.g. 10 x 10 or 50 x 50 metres.

---

## Noise

Noise is generally described as undesired sound.

---

## Loudness

The loudness is more a matter of perception. Two tones with the same sound level but different frequency are often perceived as being differently loud. The measurement unit of loudness is the “phon” and the definition of phon is based on the subjective comparison of two sound events.

---

## Maximum sound level

The parameter which has the greatest influence on the irritation factor of a noise is the maximum sound level. It determines how strongly the noise stands out from the existing background noises. The maximum sound level is used for the calculation of another aircraft noise evaluation measure (long-term energy equivalent sound level), but is also an independent criterion in itself for the evaluation of the aircraft noise situation. The irritation effect depends on the level and the frequency of occurring maximum sound levels.

---

## Sound

Sound is generated by vibrations of a sound source.

---

## Sound pressure level

The sound pressure level is stated in decibels “dB (A)” and is perceived for the loudness. The decibel scale from 0 to 120 dB (A) reflects the range from the absolute threshold of hearing to the pain threshold (see graphic: Noise Thermometer, page 7).

---

**Legal Notice**

Gemeinnützige Umwelthaus GmbH  
Rüsselsheimer Str. 100  
65451 Kelsterbach

<b>Tel</b>	06107 98868-0
------------	---------------

<b>Fax</b>	06107 98868-19
------------	----------------

<b>Email</b>	<a href="mailto:norah@umwelthaus.org">norah@umwelthaus.org</a>
--------------	--

**Concept, text and design**

Mann beißt Hund – Agentur für Kommunikation GmbH  
[www.mann-beisst-hund.de](http://www.mann-beisst-hund.de)

**Last updated**

April 2014  
(revised edition)